

# IRON AGE

TOP 1000 Design gratings

## System overview design gratings

„SUNSET“

„ARGO“

„LOCUST“

„CARBOCHON“

„INTERLAKEN“

„JANIS“







„PARADISE“

„OBLIO“

„GREEK KEY“

„RIVER ROCKS“




A15	B125	C250	D400	E600	F900
					
<ul style="list-style-type: none"> <li>• Pedestrians</li> <li>• Cyclists</li> <li>• Green areas</li> </ul>	<ul style="list-style-type: none"> <li>• Passenger car parking lots and parking decks</li> <li>• Delivery vans</li> </ul>	<ul style="list-style-type: none"> <li>• Trucks</li> <li>• Hard shoulder</li> <li>• Verge</li> </ul>	<ul style="list-style-type: none"> <li>• Entrances</li> </ul>	<ul style="list-style-type: none"> <li>• Industrial areas</li> </ul>	<ul style="list-style-type: none"> <li>• Special surfaces such as air traffic areas</li> </ul>

# MEA® DRAIN TOP 1000


System overview IRON AGE Design gratings




SUNSET

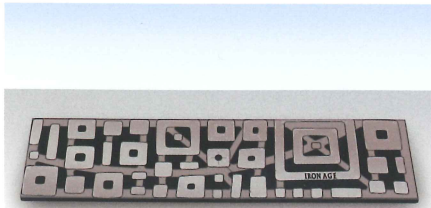


ARGO

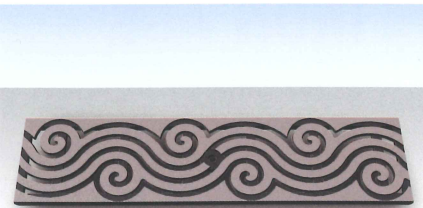


LOCUST

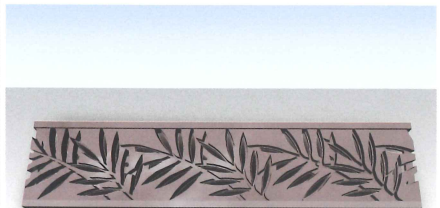


CARBOCHON

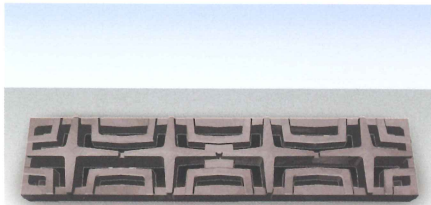


INTERLAKEN

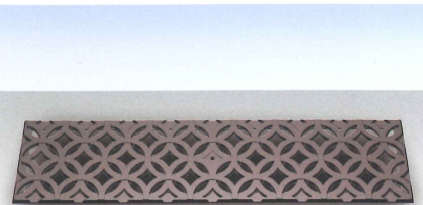


JANIS

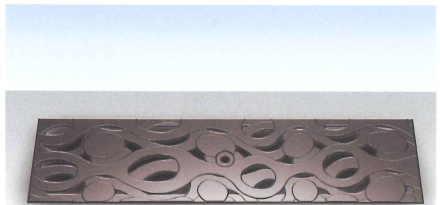


PARADISE

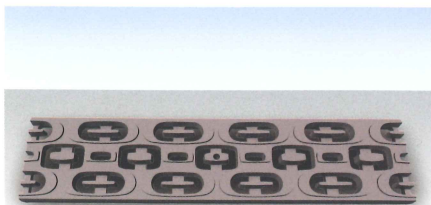


OBLIO

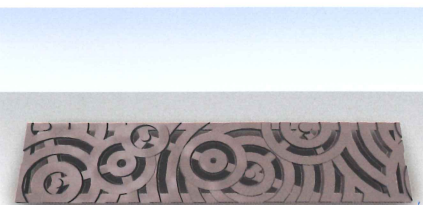

GREEK KEY

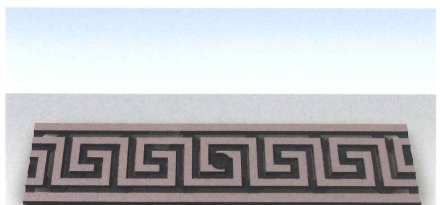

RIVER ROCKS

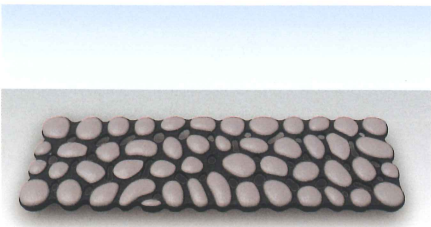

**Top 1000 IRON AGE Design covers**  
IRON AGE Design gratings, ductile iron.  
For STANDARD locking mechanism.  
Suitable for the following systems  
U 1000, Z 1000, LZ 1000/80,  
S 1000, LS 1000/80 and EN 1000.  
For channel units and silt boxes.  
Width 122 mm. All gratings meet  
the U.S. ADA requirements (building  
regulations for disabled).  
Produced from recycled and untreated  
cast iron. Locking mechanism is  
optional available.  
**Loading class A15, B125 and C250 to  
EN 1433 for standard locking mechanism**

**Contact:**  
MEA Water Management GmbH  
Industriestraße 8  
D-86551 Aichach-Ecknach  
phone: +49 (0) 8251 - 91 0  
fax: +49 (0) 8251 - 91 13 00  
e-mail: info.drainage@mea.de  
www.mea-group.com  
www.mea-drainage.com